Technical Manual

KAPPA–200 HCA

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

* Nominal Impedance:	6 ohm
* Recommended Amp Power:	30–100W
* Frequency Response:	50 Hz – 27 kHz –
* Sensitivity:	89 dB / 2,83V / 1 m
* Crossover frequency:	3,0 kHz

SYSTEM COMPONENTS:

* Cabinet	CKAPPA–200 HCA (Not for sale)
* Grille:	GKAPPA–200 HCA (2400770)
* Woofer	G1306A 170mm Woofer (26mm voice coil)
DC Resistance:	4,3 ohm

SYSTEM COMPONENTS: (cont'd)

* Tweeter	A1301B–S 25mm Ceramic Dome Tweeter
DC Resistance:	3,8 ohm
* Crossover Network:	NKAPPA–200 HCA (2700774)

PHYSICAL SPECIFICATIONS:

* Enclosure Dimensions (H.W.D):	13,37X8,66X14,06 In. D (365x220x357mm D)
* Shipping Weight:	27,56 lbs. (12,5 kg.)

WARRANTY INFORMATION:

* Refer to the Warranty Statement packed with each product

PACKAGE

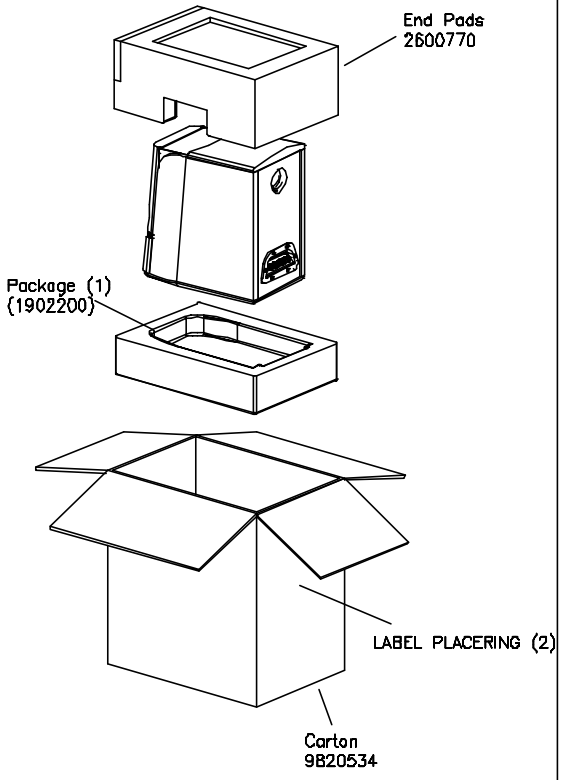

SCHEMATIC

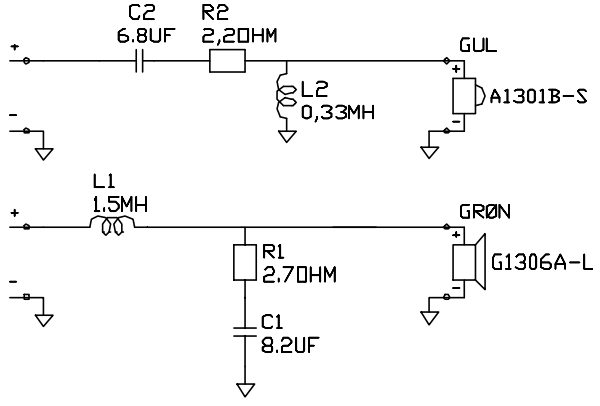

NOTE: CONE/DIAPHRAGM KIT NOT AVAILABLE.

DEFECTIVE DRIVER SHOULD BE REPLACED.

KAPPA–200 HCA

Valid fron serial no. 01001
Rev. 06.08.2002

COMPONENT EXPLODED VIEW